



Signal Filters for RF Shielded Rooms



TYPE	VOLTAGE	CURRENT	WIRE NUMBER	DIMENSION	APPLICATION
XL-3	250VDC	0.3A	2	1	TELEPHONE FAX DC SWITCH SIGNAL
XL-K2	250VAC	2A	2	1	SPECIAL TELEPHONE DC & AC SWITCH SIGNAL AIR CONDITIONER FIRE ALARM FIRE ALARM BROADCAST MICROPHONE ACCESS CONTROL
XL-V1	100VDC	1A	1	2	VIDEO SIGNAL AIR CONDITIONER
XL-V2	100VDC	2A	2	3	SPECIAL TELEPHONE AIR CONDITIONER FIRE ALARM MONITOR ACCESS CONTROL

OUTLINE DRAWING AND DIMENSIONS (mm)

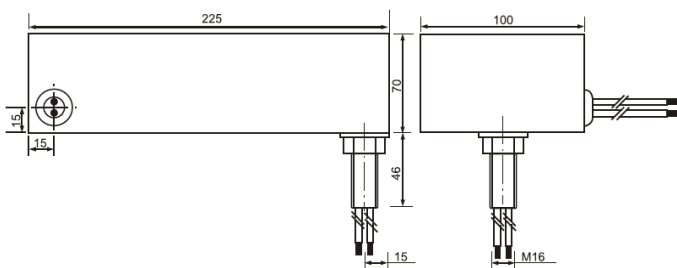


fig. 1

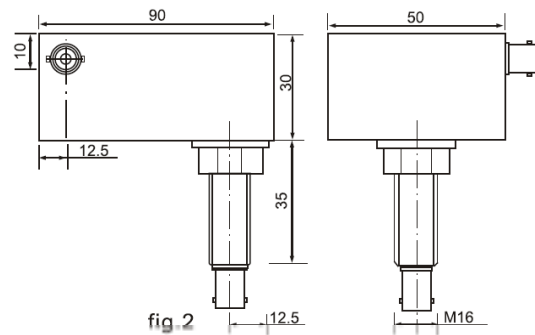


fig. 2

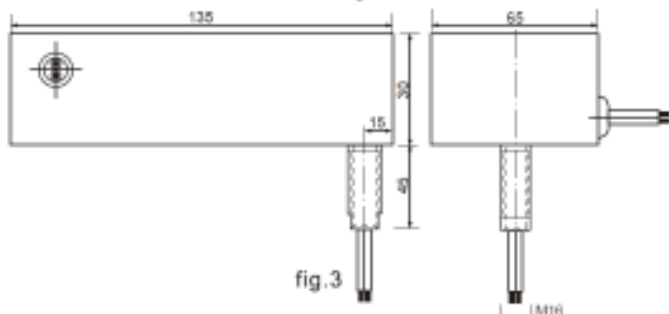


fig. 3