



## T Series




- High performance filters
- Low leakage current

### TECHNICAL DATA

Rated Voltage	120/260VAC
Operating Frequency	50/60Hz
Rated Current	2A-80A
Test Voltage (1min)	1500VDC (line – line) 1500VAC (line – ground)
Climatic category	25/085/21

Model	Terminal		Rated Current (A)	Ground Capacitance (nF)	Leakage Current ≤ (mA)	Discharge Resistance (MΩ)	Circuit Diagram fig.	Dimension fig.
	Input	Output						
DL-2T1	Spade Terminal		2	2.2	0.5	1	1	A3
DL-3T1	Spade Terminal		3	3.3	0.5	1.5	1	A3
DL-3T3	Spade Terminal		3	3.3	0.5		3	B1
DL-6T1	Spade Terminal		6	3.3	0.5	1.5	2	A3
DL-6T112	Threaded Stud		6	2.2	0.5	0.47	1	A4
DL-10T1	Threaded Stud		10	3.3	0.5	1.5	2	A3
DL-10T11	Threaded Stud		10	3.3	0.5	1	2	A4
DL-12T1	Threaded Stud		12	4.7	0.8	1	2	A6
DL-15T1	Threaded Stud		15	3.3	0.5	1.5	2	D1
DL-16T12	Threaded Stud		16	3.3	0.5	0.68	2	D4
DL-20T1	Threaded Stud		20	4.7	0.8	1.5	2	D2
DL-25T11	Threaded Stud		25	3.3	0.5	0.68	2	F4
DL-30T11	Threaded Stud		30	3.3	0.5	0.68	2	F3
DL-50T3	Threaded Stud		50	6.8	1.0	1.5	2	E4
DL-80T1	Threaded Stud		80	4.7	0.8	0.68	2	G6

**TYPICAL CIRCUIT DIAGRAM**

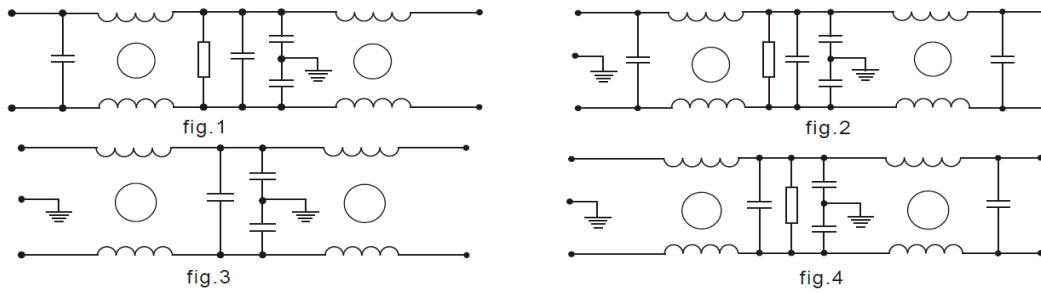

**INSERTION LOSS**

(50Ω, IEC/CISPR No 17, Measured in 50Ω system, as IEC/CISPR No. 17)

