




## DIMENSIONS (mm)

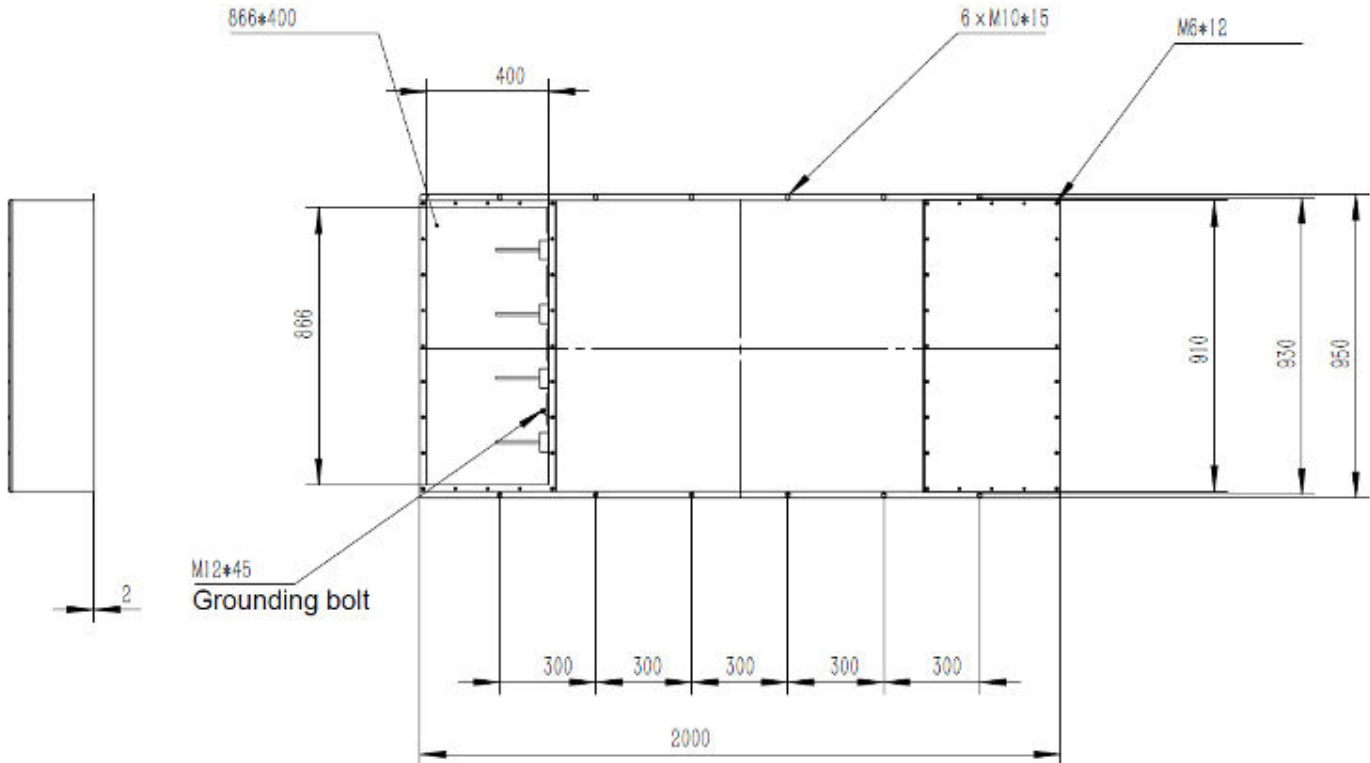

## TECHNICAL DATA

Rated Voltage	440VAC/250VAC (3 phase 4 lines)
---------------	---------------------------------

Operating Frequency	0-60Hz
---------------------	--------

Rated Current	1000A
---------------	-------

Shielding Effectiveness	≤ 60dB, 100kHz-1GHz
-------------------------	---------------------

Weight	100 kg approx
--------	---------------

Climatic Category	25/085/21
-------------------	-----------

*Complies with the transient suppression/attenuation of the short pulse in MIL-STD-188-125-E1*

**INSTALLATION DIAGRAM**

