




CE-DL-4x650C52/EMP

DIMENSIONS (mm):

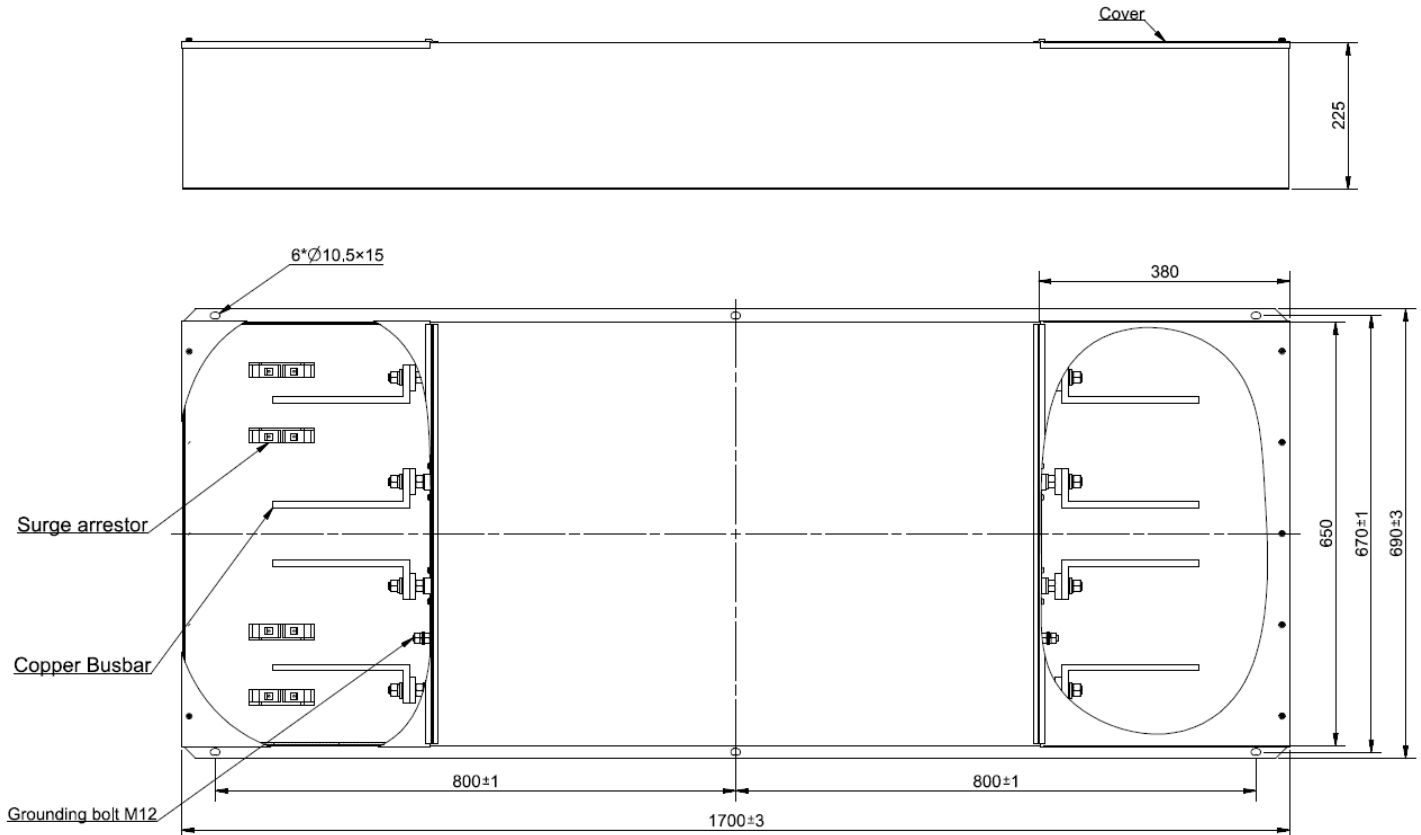

TECHNICAL DATA

Rated Voltage	440VAC/250VAC (3 phase 4 lines)
Operating Frequency	0-60Hz
Rated Current	650A
Shielding Effectiveness	≤ 60dB, 100kHz-1GHz
Weight	70 kg approx.
Climatic Category	25/085/21

Complies with the transient suppression/attenuation of the short pulse in MIL-STD-188-125-E1

INSTALLATION DIAGRAM

