




CE-PF486C-16/EMP/NH

DIMENSIONS

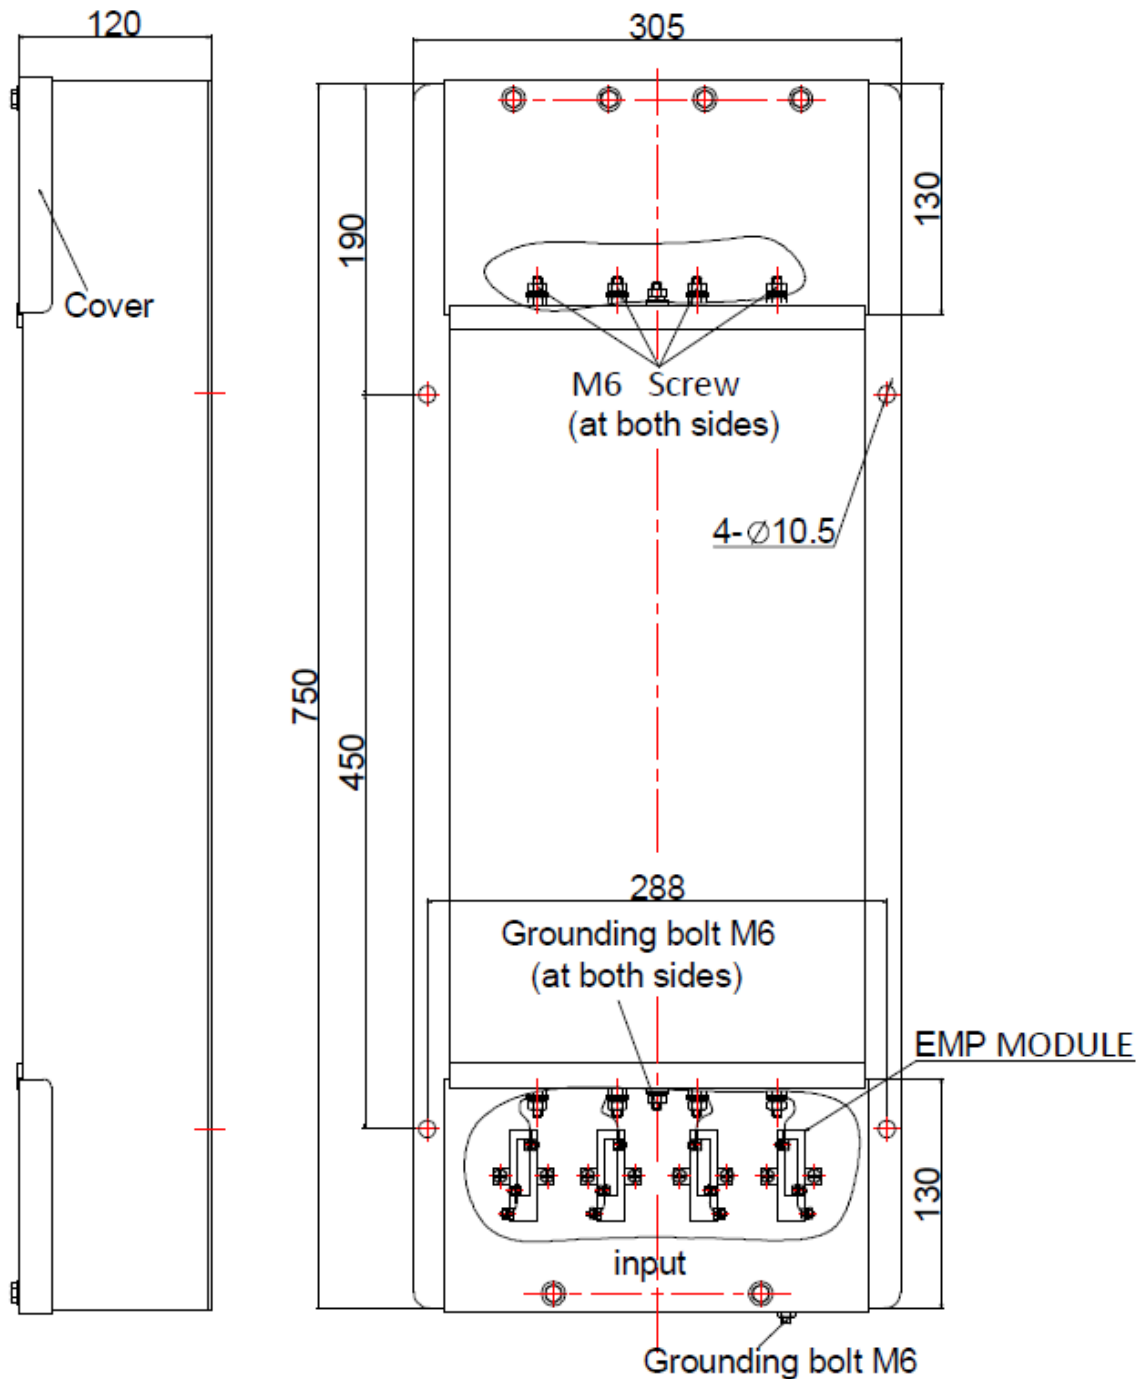

TECHNICAL DATA

Rated Voltage	250VAC/500VDC
Operating Frequency	0-60Hz
Rated Current	4x16A
Shielding effectiveness	100dB, 14kHz-40GHz
Weight	kg (approx)
Climatic Category	25/085/21

Complies with the transient suppression/attenuation of the short pulse in MIL-STD-188-125-E1

TYPICAL PRODUCT IN PHOTO CE-PF482-100**INSTALLATION DIAGRAM**