




CE-PF486C-250/EMP/NH

DIMENSIONS (mm)

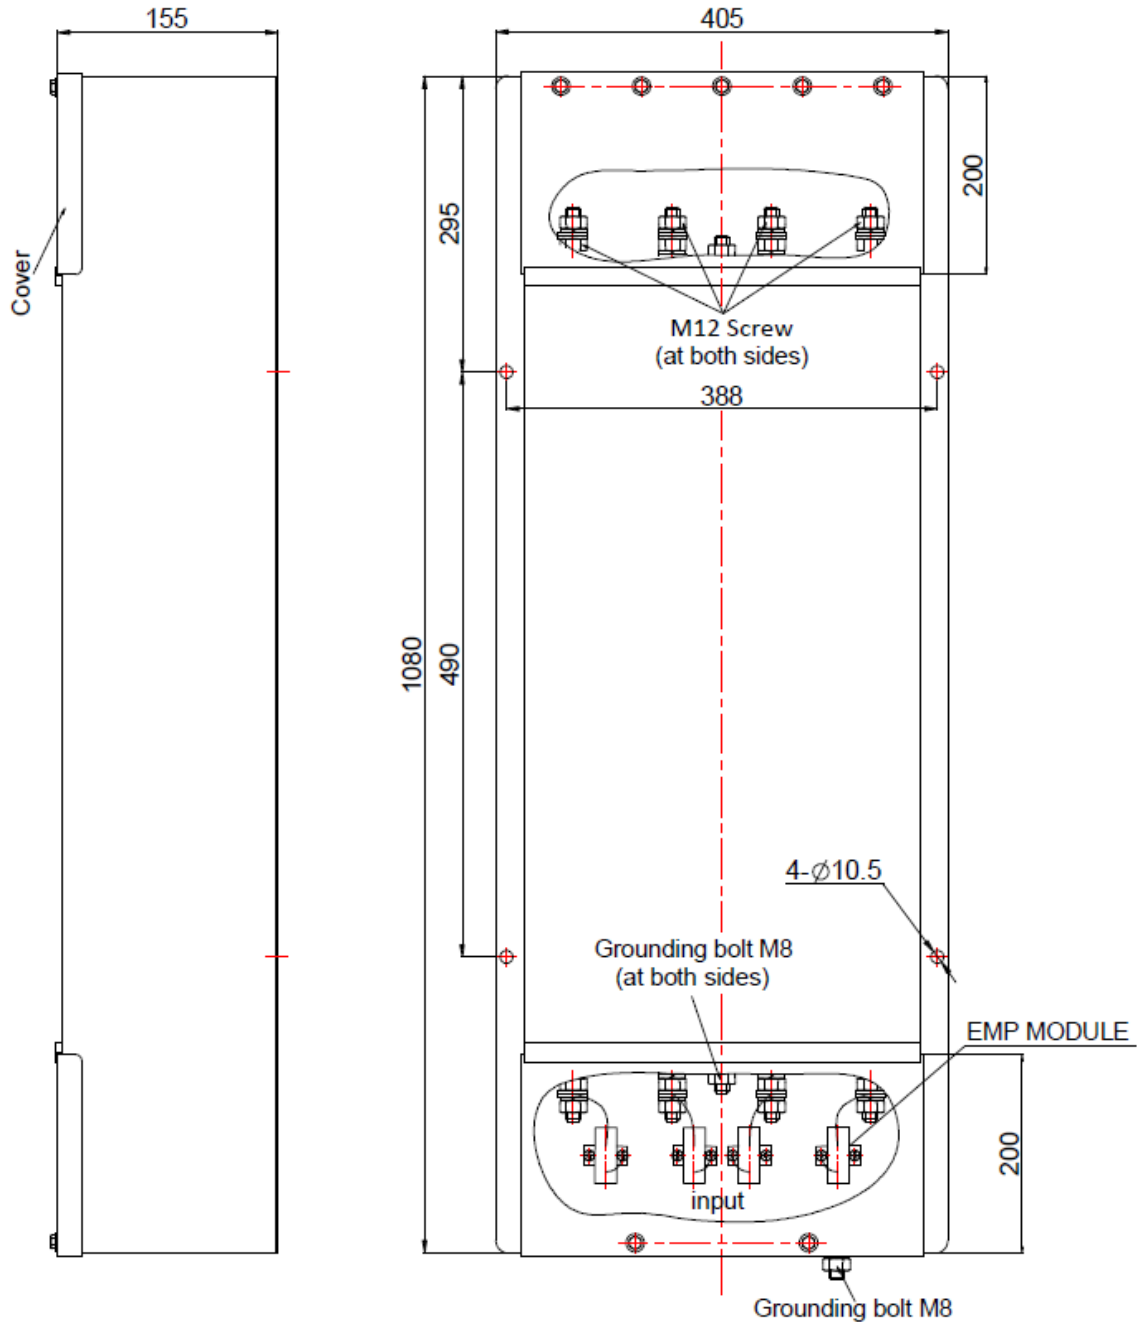

**TECHNICAL DATA**

Rated Voltage	440VAC/250VAC
Operating Frequency	0-60Hz
Rated Current	250A
Shielding Effectiveness	100dB, 14kHz-40GHz
Weight	kg (approx.)
Climatic Category	25/085/21

*Complies with the transient suppression/attenuation of the short pulse in MIL-STD-188-125-E1*

**TYPICAL PRODUCT IN PHOTO CE-PF482-100****INSTALLATION DIAGRAM**