




**COMPLIANCE  
ENGINEERING**

EMC Product Safety Environmental Shielding

90 Indian Drive  
Keysborough VIC 3173 Australia  
Telephone: + 61 3 9763 3079  
Email: [info@compeng.com.au](mailto:info@compeng.com.au)  
Web: [www.compeng.com.au](http://www.compeng.com.au)  
ABN: 56 101 639 588

## CEP-4X16C52-EMP EMP - Power Line Filter

RF Shielded Enclosure, Faraday Cage, RF Shielded Room

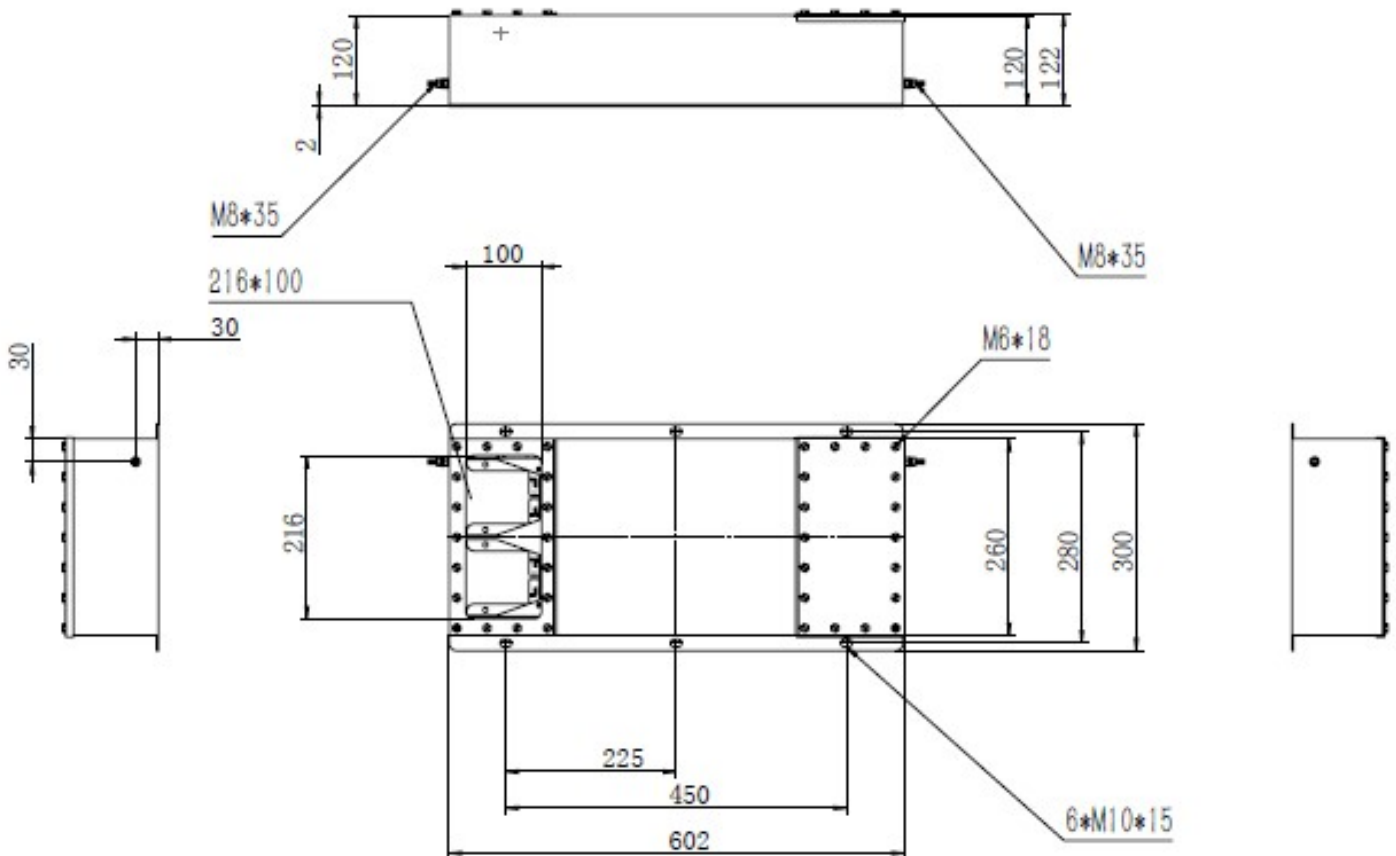

Rated Voltage:	440 VAC L-L (250 VAC L-E)
EMP Level:	MIL-STD-188-125 E1 (short pulse testing)
Rated Current:	16 A (4 lines)
Operating frequency:	0 to 60 Hz
Insertion Loss:	>60 dB, 100 kHz to 1 GHz
Climatic Category:	25/085/21